


## #10-32 & 1/8" NPT Valves

### MAV-2

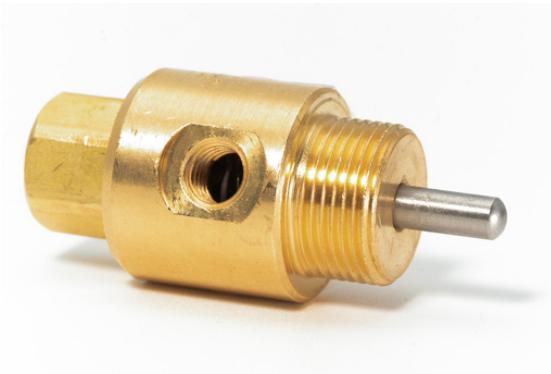

The MAV series are #10-32 ported valves that change their flow path when the stem is depressed or released. The 2-Way and 3-Way valves are offered in both Normally-Closed (not passing) or Normally-Open (passing) versions.

2D File	2D File
<b>Air Flow</b>	110 l/min @ 50 psig; 190 l/min @ 100 psig
<b>Function</b>	2-Way
<b>Included Item(s)</b>	Nut & Lockwashers
<b>Input PSI</b>	300 psig
<b>Material, Body</b>	Brass, ENP Available
<b>Material, Seals</b>	Nitrile Std., FKM & Krytox Optional
<b>Material, Spring &amp; Stem</b>	Stainless Steel
<b>Medium</b>	Air, Water or Oil
<b>Mount</b>	15/32-32 thread.
<b>Operating Temperature Range</b>	32 to 230°F (0 to 110°C)
<b>Port, Inlet</b>	#10-32
<b>Port, Outlet</b>	#10-32
<b>Porting</b>	Normally-Closed
<b>Product Line Brochure</b>	<a href="#">Mechanical Valves</a>
<b>Stem Travel</b>	1/8"
<b>Style</b>	Stem
<b>Unit</b>	Imperial
<b>Weight (lbs.)</b>	0.0900

