#10-32 & 1/8" NPT Valves


MAV-3C




The MAV series are #10-32 ported valves that change their flow path when the stem is depressed or released. The 2-Way and 3-Way valves are offered in both Normally-Closed (not passing) or Normally-Open (passing) versions.

2D File	2D File
Air Flow	85 l/min @ 50 psig; 170 l/min @ 100 psig
Function	3-Way
Included Item(s)	Nut & Lockwashers
Input PSI	300 psig
Material, Body	Brass, ENP Available
Material, Seals	Nitrile Std., FKM & Krytox Optional
Material, Spring & Stem	Stainless Steel
Medium	Air, Water or Oil
Mount	#15-32 Thread. Cartridge insets into 0.375" ±0.001" bore.
Operating Temperature Range	32 to 230°F (0 to 110°C)
Port, Inlet	Cartridge
Port, Outlet	Cartridge
Porting	Normally-Closed
Product Line Brochure	Mechanical Valves
Stem Travel	1/8"
Stem Travel	1/8"
Style	Stem
Unit	Imperial
Weight (lbs.)	0.0300

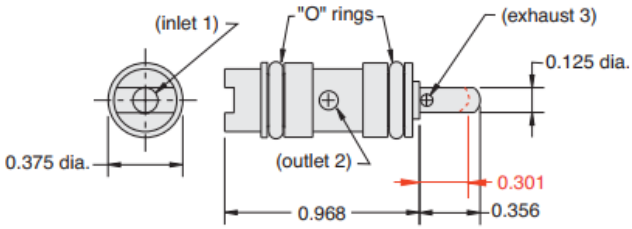


(inlet 1)
"O" rings
(exhaust 3)
0.125 dia.
0.375 dia.
(outlet 2)
0.301
0.968
0.356

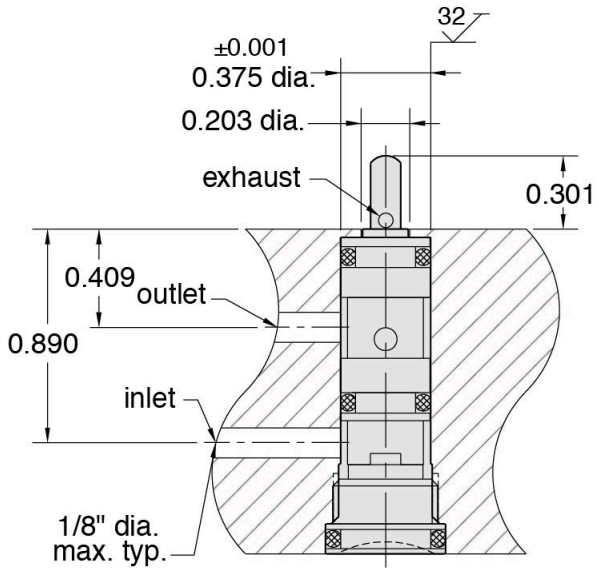
32
±0.001
0.375 dia.
0.203 dia.
exhaust
0.301
0.409
outlet
0.890
inlet
1/8" dia.
max. typ.