




#10-32 & 1/8" NPT Valves

MAVO-3P

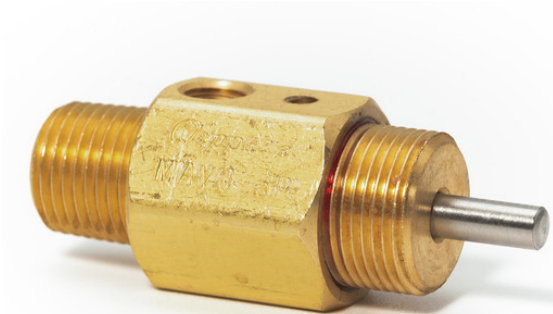

The MAV series are #10-32 ported valves that change their flow path when the stem is depressed or released. The 2-Way and 3-Way valves are offered in both Normally-Closed (not passing) or Normally-Open (passing) versions.

2D File	2D File
Air Flow	170 l/min @ 50 psig; 280 l/min @ 100 psig
Function	3-Way
Included Item(s)	Nut & Lockwashers
Input PSI	150 psig max.
Material, Body	Brass, ENP Available
Material, Seals	Nitrile Std., FKM & Krytox Optional
Material, Spring & Stem	Stainless Steel
Medium	Air, Water or Oil
Mount	15/32-32 thread.
Operating Temperature Range	32 to 230°F (0 to 110°C)
Port, Inlet	1/8" NPT
Port, Outlet	#10-32
Porting	Normally-Open
Product Line Brochure	Mechanical Valves
Stem Travel	1/8"
Stem Travel	1/8"
Style	Stem
Unit	Imperial
Weight (lbs.)	0.1000

