






## MJVO-2



|                      |                                           |
|----------------------|-------------------------------------------|
| <b>Air Flow</b>      | 200 l/min @ 50 psig; 340 l/min @ 100 psig |
| <b>Input PSI</b>     | 300 psig                                  |
| <b>Stem Travel</b>   | 1/8"                                      |
| <b>Weight (lbs.)</b> | 0.1700                                    |

2-Way Valve, Normally-Open, 1/8" NPT

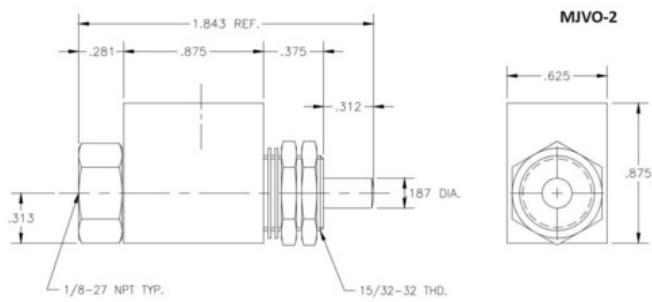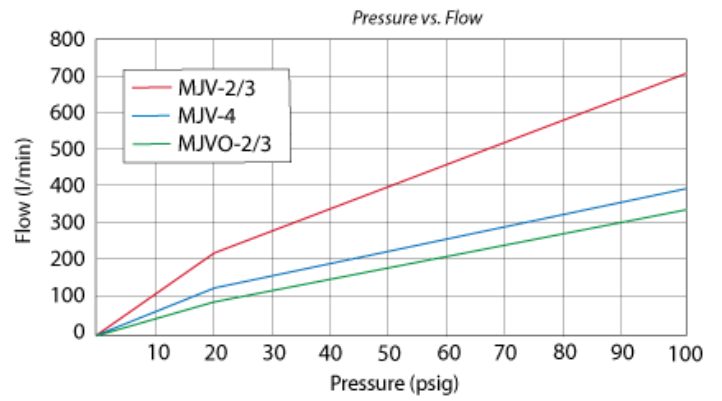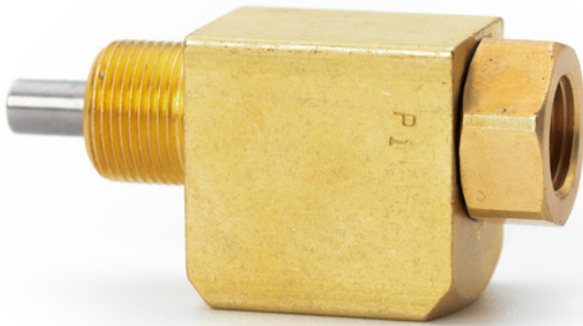

- SPECIFICATIONS:
- 1.) MAX. PRESSURE: 300 PSI AIR
  - 2.) TEMPERATURE RANGE: 32° TO 230° F
  - 3.) MATERIALS: BRASS, ST. STL., AND BUNA-N SEALS
  - 4.) FLOW: 7 SCFM AT 50 PSIG  
12 SCFM AT 100 PSIG
  - 5.) FORCE FOR FULL STEM TRAVEL: 36 OZ. NOMINAL
  - 6.) LUBE OPTIONS: SILICONE BASE (-OX), KRYTOX (-KR)

