


# Clippard

## MMA-41NAA



#10-32 5 Port 4-Way Dbl. Pilot Actuated Air Valve

<b>Air Flow</b>	450 l/min @ 50 psig, 760 l/min @ 100 psig
<b>Max PSI</b>	125 psig
<b>Medium</b>	Air
<b>Mount</b>	Body Ported, Manifold Mount
<b>Seals</b>	Nitrile
<b>Temperature Range</b>	32 to 150°F

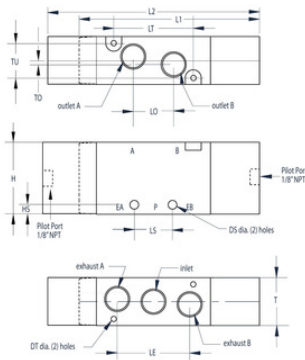

Dim.	MMA-41	MMA-42	MMA-43	MMA-44
DS	0.13	0.17	0.17	0.22
DT	0.13	0.13	0.17	0.17
H	1.06	1.38	1.57	1.97
HS	0.16	0.28	0.27	0.30
L1	2.71	3.05	3.76	4.96
L2	3.19	3.62	4.37	5.43
LE	1.08	1.42	1.77	2.48
LO	0.61	0.83	0.94	1.42
LS	0.55	0.79	0.94	1.10
LT	1.18	1.50	1.97	2.83
T	0.71	0.87	1.06	1.34
TO	0.60	0.06	0.08	0.08
TU	0.51	0.67	0.79	1.06