




## Miniature Brass Air-Piloted Valves

### PAV-2

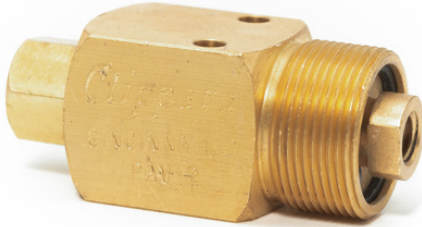

The PAV Series Normally-Open or Normally-Closed 2-Way valves incorporate an integral pilot actuator that provides a compact assembly and simple installation. The internal valving is similar to the MAV-2 or MAVO-2. They are ideal for remote and miniature applications which require higher air flow and/or lower power.

|                              |                                                             |
|------------------------------|-------------------------------------------------------------|
| <b>Accessories</b>           | Foot Bracket [Part:FB-1791], Nut & Lockwasher [Part:PAV-MH] |
| <b>Air Flow</b>              | 113 l/min @ 50 psig; 190 l/min @ 100 psig                   |
| <b>Function</b>              | 2-Way Normally-Closed                                       |
| <b>Input PSI</b>             | 300 psig (21bar) max.                                       |
| <b>Material, Body</b>        | Brass Body, Stainless Steel Stem & Spring                   |
| <b>Material, Seals</b>       | Nitrile                                                     |
| <b>Medium</b>                | Air, Water or Oil                                           |
| <b>Mount</b>                 | 5/8-32 Thread or #4 Screw                                   |
| <b>Pilot Pressure</b>        | 20 psig (1,4 bar) min.                                      |
| <b>Ports</b>                 | #10-32                                                      |
| <b>Product Line Brochure</b> | <a href="#">Mechanical Valves</a>                           |
| <b>Weight (lbs.)</b>         | 0.1200                                                      |

