



## Heavy-Duty Push Buttons

PC-3E-YL



<b>Color</b>	Yellow
<b>Material, Body</b>	Electroless Nickel-Plated Brass, Delrin & Stainless Steel
<b>Mount</b>	5/8-32 (16 mm) Thread
<b>Note</b>	Mount on panels or brackets up to 1/4" thick.
<b>Product Line Brochure</b>	<a href="#">Mechanical Valves</a>
<b>Style</b>	Extended


Heavy-Duty Push Button Actuators can be used on individual stem operated valves or in panel mounting applications. These push buttons are available in a variety of colors, allowing you to color code, or easily differentiate between valves when designing control systems. They feature a built-in spring so the button always returns to the extended position when released with no additional load on the valve.

The design of these push buttons allows complete actuation of the valve with no over-travel or side load to the valve assuring superior performance and long life.



#### DIMENSIONS

SIZE	MODEL	"D" Dia.	"H" Hgt.	"T" Thd.	"P" Panel Hole	"F" Hex Flats
5/8-32 (16 mm) mig. thd.	PC-3E-□□ PC-3F-□□ PC-3M-□□	0.625" 0.625" 1.165"	0.500"	5/8-32	5/8" dia.	3/4"
7/8-32 (22 mm) mig. thd.	PC-4E-□□ PC-4F-□□ PC-4M-□□	0.925" 0.925" 1.500"	0.500"	7/8-32	7/8" dia.	1-1/16"
1 3/16-28 (30 mm) mig. thd.	PC-5E-□□ PC-5F-□□ PC-5M-□□	1.165" 1.165" 1.500"	0.500"	1 3/16-28	1 3/16" dia.	1-5/16"

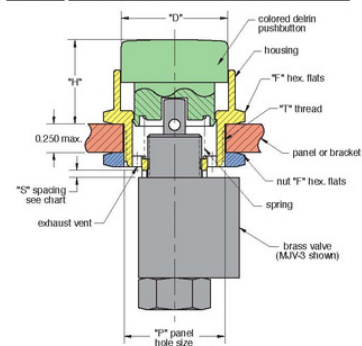

#### SPACING "S" REQUIRED FOR PROPER VALVE ACTUATION

Valve series	MAV-2, MAVO-2 MAV-3, MAVO-3 HV-3, -4	MAV-4, -4D MJV-4, -4D	MJV-2, -3 MJVO-2, -3 FV-3, -4, -5 GV-2, -3
• Mounting thd.	1/4"	1/4"	3/8"
• Stem extension	5/16"	3/8"	5/16"
• Valve stroke	1/8"	3/16"	1/8"
"S" Minimum	none	none	1/16"
"S" Maximum	1/16"	1/16"	1/8"