




Bulkhead Unions

PQ-BU04-PKG

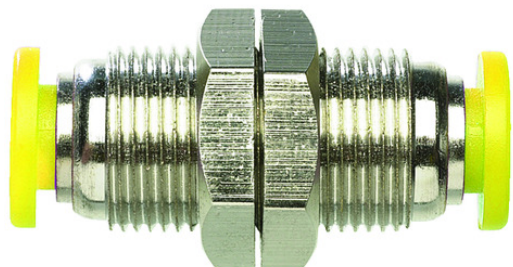

Push-Quick Fittings provide a simple method of connecting pneumatic components to each other and system piping. They are designed for use with both flexible hose and stiff tubing made of nylon, urethane, polyethylene or polypropylene.

Diameter, OD	1/8" OD
Material, Seals	Nitrile
Medium	Air & Non-Corrosive Water
Operating Pressure	29.5" Hg to 150 psig
Operating Temperature Range	32 to 140°F (0 to 60°C)
Packaging	Package of 5
Product Line Brochure	Mechanical Valves
Thread	M12x1
Weight (lbs.)	0.2100

