




## Bulkhead Unions

### PQ-BU12-BLK

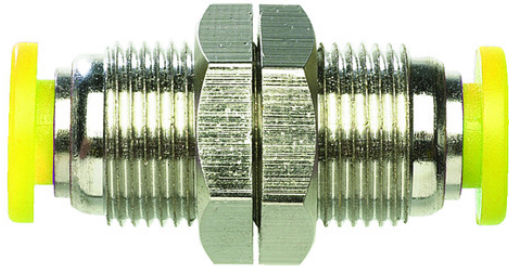

Push-Quick Fittings provide a simple method of connecting pneumatic components to each other and system piping. They are designed for use with both flexible hose and stiff tubing made of nylon, urethane, polyethylene or polypropylene.

|                                    |                                   |
|------------------------------------|-----------------------------------|
| <b>Diameter, OD</b>                | 3/8" OD                           |
| <b>Material, Seals</b>             | Nitrile                           |
| <b>Medium</b>                      | Air & Non-Corrosive Water         |
| <b>Operating Pressure</b>          | 29.5" Hg to 150 psig              |
| <b>Operating Temperature Range</b> | 32 to 140°F (0 to 60°C)           |
| <b>Packaging</b>                   | Bulk (minimum 250 pc)             |
| <b>Product Line Brochure</b>       | <a href="#">Mechanical Valves</a> |
| <b>Thread</b>                      | M20x1                             |

