Male Angle Connectors

PQ-MA08P-BLK

Push-Quick Fittings provide a simple method of connecting pneumatic components to each other and system piping. They are designed for use with both flexible hose and stiff tubing made of nylon, urethane, polyethylene or polypropylene.

Diameter, OD	1/4" OD
Operating Pressure	29.5" Hg to 150 psig (10.3 bar)
Operating Temperature Range	32F to 140F (0 to 60°C)
Packaging	Bulk (minimum 250 pc)
Product Line Brochure	Mechanical Valves
Thread	1/8" NPT
Weight (lbs.)	0.2200

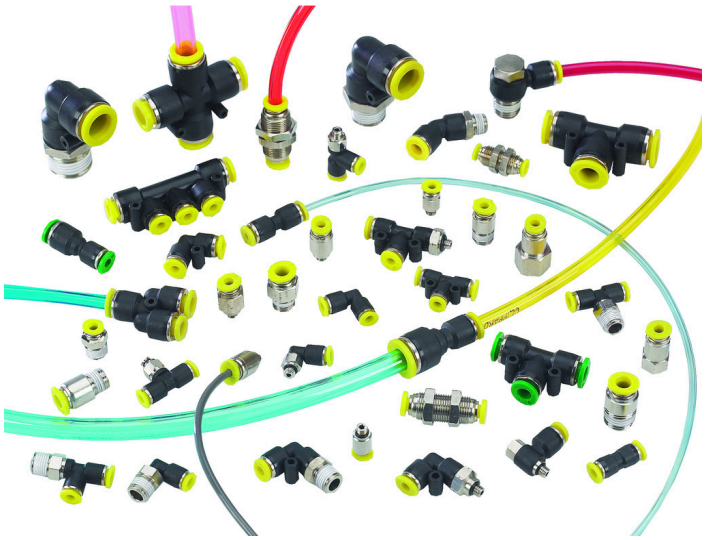

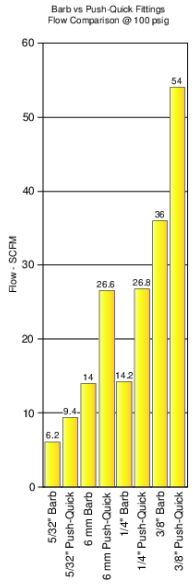
Barb vs Push-Quick Fittings
Flow Comparison @ 100 psig
Flow - SCFM
60
50
40
30
20
10
0
6.2
9.4
14
26.6
14.2
26.8
36
54
5/32" Barb
5/32" Push-Quick
6 mm Barb
6 mm Push-Quick
1/4" Barb
1/4" Push-Quick
3/8" Barb
3/8" Push-Quick