





Y Connectors

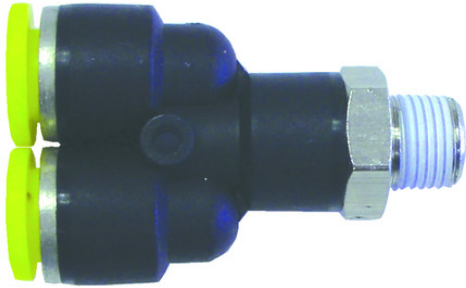

Medium	Air & Non-Corrosive Water
Operating Pressure	29.5" Hg to 150 psig (10.3 bar)
Operating Temperature Range	32 to 140°F (0 to 60°C)
Product Line Brochure	Mechanical Valves

Push-Quick Fittings provide a simple method of connecting pneumatic components to each other and system piping. They are designed for use with both flexible hose and stiff tubing made of nylon, urethane, polyethylene or polypropylene.

Y Connector (5/pack)



Tubing	Thread "T"	Part No.	"A"	"C"	"H" Hex.
1/8"	#10-32	PQ-YC04N	1.630"	0.410"	7/16"
	1/8" NPT	PQ-YC04P	1.660"	0.410"	7/16"
5/32"	#10-32	PQ-YC05N	1.630"	0.410"	7/16"
	1/8" NPT	PQ-YC05P	1.660"	0.410"	7/16"
1/4"	#10-32	PQ-YC08N	1.690"	0.524"	1/2"
	1/8" NPT	PQ-YC08P	1.770"	0.524"	1/2"
	1/4" NPT	PQ-YC08Q	1.830"	0.580"	9/16"
5/16"	1/8" NPT	PQ-YC10P	1.830"	0.580"	9/16"
	1/4" NPT	PQ-YC10Q	1.900"	0.720"	1 1/16"
3/8"	1/4" NPT	PQ-YC12Q	2.340"	0.720"	1 1/16"
	3/8" NPT	PQ-YC12W	2.400"	0.850"	7/8"
1/2"	3/8" NPT	PQ-YC16W	2.500"	0.850"	7/8"
	1/2" NPT	PQ-YC16Z	2.600"	0.850"	7/8"

