




## Tee Barb Connector Fittings

TT0-202-BLK

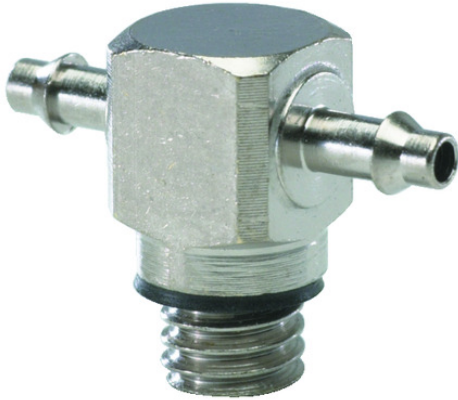

Minimatic barb fittings provide a flexible, easy alternative to ferrule and push-to-connect/push-quick fittings. Designed for use with urethane hose, barb fittings will provide a leak-free connection that will hold well beyond the working pressure of the hose without the need for additional clamps.

|                              |                                                |
|------------------------------|------------------------------------------------|
| <b>Material, Body</b>        | Electroless Nickel Plated Brass                |
| <b>Material, Seal</b>        | Nitrile Gasket Std. FKM Available              |
| <b>Package</b>               | Bulk (Minimum of 250 pc)                       |
| <b>Port, Bottom</b>          | #10-32 Male Thread                             |
| <b>Port, Left</b>            | 1/16" Barb                                     |
| <b>Port, Right</b>           | 1/16" Barb                                     |
| <b>Product Line Brochure</b> | <a href="#">Mechanical Valves</a>              |
| <b>Seals</b>                 | Nitrile Gaskets Ordered Separately<br>#11761-2 |
| <b>Style</b>                 | Threaded Tee                                   |
| <b>Tubing</b>                | <a href="#">1/16" I.D. Tubing</a>              |
| <b>Weight (lbs.)</b>         | 0.0050                                         |
| <b>Wrench Flat</b>           | 1/4" Square                                    |

