




Urethane Hose

URH1-0804-CLT-500

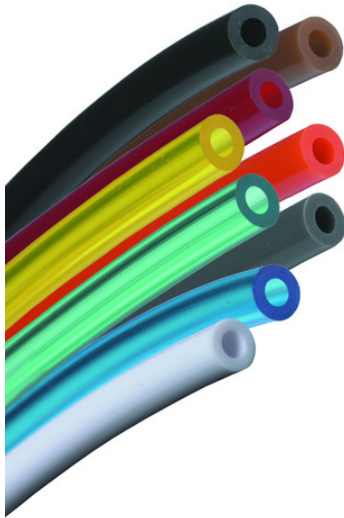

Made of a combination of both plastic and rubber, Polyurethane hose is naturally flexible and offers abrasion and tear resistance, high tensile and elongation values, and low compression set. 85A Polyurethane is naturally flexible and exhibits virtually unlimited flexural abilities. Many colors and sizes available.

Bend Radius	3/8"
Color	Clear
Diameter, OD (ID)	1/4" (1/8")
Flow	0 to 105 psig at 100°F (max. 120°F)
Length	500' Spool
Notes	85A Durometer. (former Part No. 3814-6-X)
Product Line Brochure	Mechanical Valves
Static Burst Pressure	Approx. 425 psig at 70°F

