




Polyurethane Tubing

URT1-0503-BLT-500

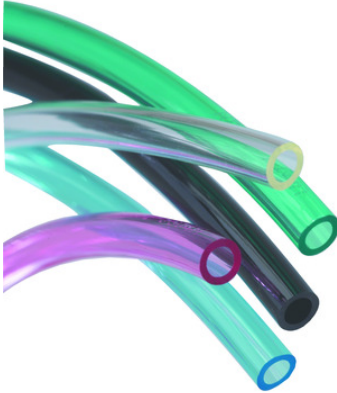

Polyurethane tubing offers a wider range of chemical compatibility than vinyl, may be used at much higher temperatures, and does not require clamps when used with barb fittings.

Bend Radius	3/8"
Color	Translucent Blue
Diameter, OD (ID)	5/32" (3/32")
Length	500' Spool
Max. Flow	0 to 105 psig at 100°F (max. 120°F)
Notes	95A Durometer
Product Line Brochure	Mechanical Valves
Static Burst Pressure	Over 500 psig at 70°F

