




Polyurethane Tubing

URT1-1208-BLT-500

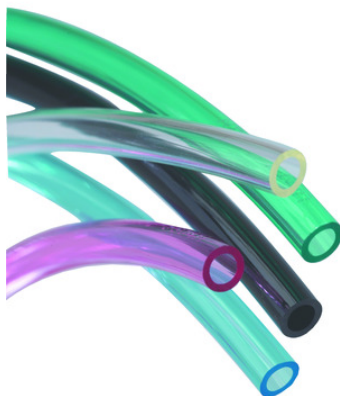

Bend Radius	7/8"
Color	Translucent Blue
Diameter, OD (ID)	3/8" (1/4")
Length	500' Spool
Max. Flow	0 to 105 psig at 100°F (max. 120°F)
Notes	95A Durometer
Product Line Brochure	Mechanical Valves
Static Burst Pressure	Over 440 psig at 75°F

Polyurethane tubing offers a wider range of chemical compatibility than vinyl, may be used at much higher temperatures, and does not require clamps when used with barb fittings.

