




Polyurethane Tubing

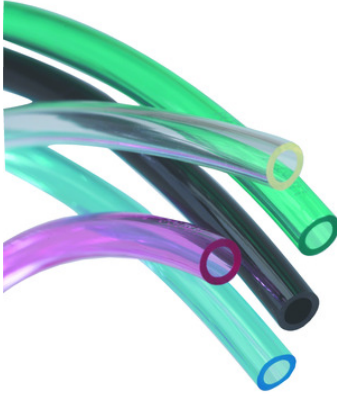

Max. Flow	0 to 105 psig at 100°F (max. 120°F)
Notes	Designed for use with push-in fittings
Product Line Brochure	Mechanical Valves

Polyurethane tubing offers a wider range of chemical compatibility than vinyl, may be used at much higher temperatures, and does not require clamps when used with barb fittings.

