Elbow Barb Fittings

UT0-3-BLK

Hose Barb	3/32" ID
Material, Body	Electroless Nickel Plated Brass
Material, Seal	Nitrile O-Ring Std. FKM Available
Package	Bulk (Minimum of 250 pc)
Port, Bottom	#10-32 Male Threaded Elbow
Port, Side	3/32" Barb
Product Line Brochure	Mechanical Valves
Tubing, Inside Diameter	3/32" I.D. Tubing
Type	Positionable
Weight (lbs.)	0.0050
Wrench Flats	5/16" Hex

Minimatic barb fittings provide a flexile, easy alternative to ferrule and push-to-connect/push-quick fittings. Designed for use with urethane hose, barb fittings will provide a leak-free connection that will hold well behond the working pressure of the hose without the need for additional clamps.

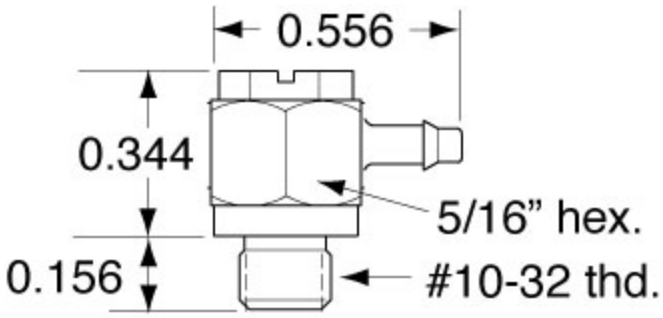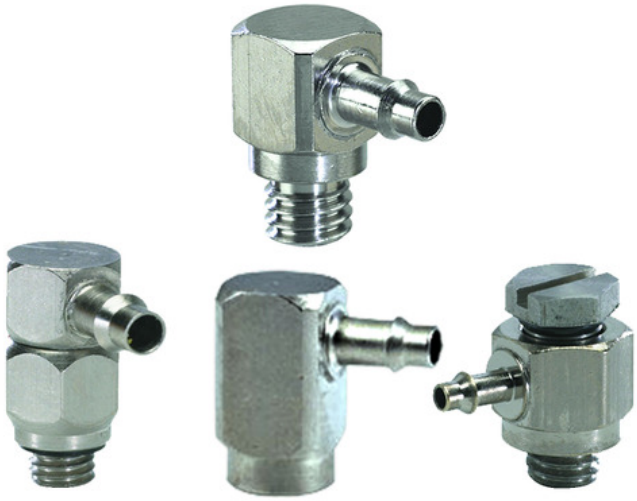
0.556
0.344
5/16” hex.
0.156
#10-32 thd.