

Cross Barb Connector Fittings

X44-402-BLK

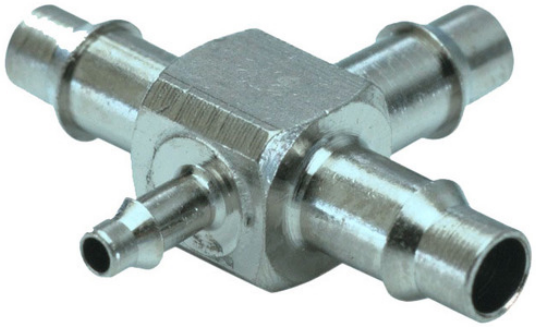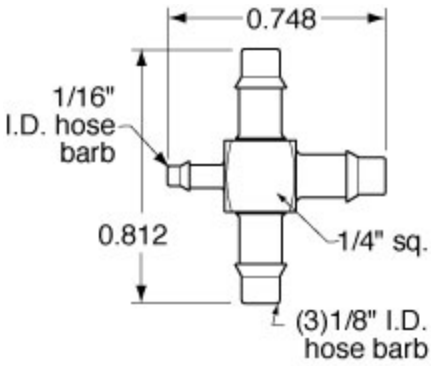

Minimatic barb fittings provide a flexile, easy alternative to ferrule and push-to-connect/push-quick fittings. Designed for use with urethane hose, barb fittings will provide a leak-free connection that will hold well behond the working pressure of the hose without the need for additional clamps.

Hose Barb	1/16"-1/8"-1/8"-1/8" ID
Length	0.812"
Material, Body	Electroless Nickel Plated Brass
Package	Bulk (Minimum of 250 pc)
Port, Bottom	1/16" Barb
Port, Left	1/8" Barb
Port, Right	1/8" Barb
Port, Top	1/8" Barb
Product Line Brochure	Mechanical Valves
Tubing	1/16" I.D. Tubing
Tubing	1/8" I.D. Tubing
Weight (lbs.)	0.0050
Wrench Flats	1/4" Square


0.748
1/16"
I.D. hose
barb
0.812
1/4" sq.
(3)1/8" I.D.
hose barb

