


Conector macho en ángulo


(paquete de 10 unidades)

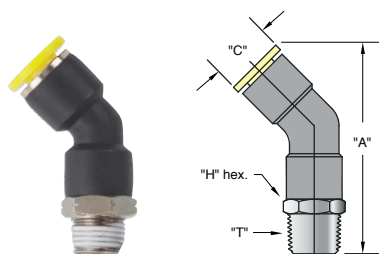

Tubería	Rosca "T"	No. de parte	"H" Hex.	"A"	"C"
1/8"	#10-32 1/8" NPT	PO-MA04N PO-MA04P	7/16"	1.454" 1.474"	0.410"
5/32"	#10-32 1/8" NPT	PO-MA05N PO-MA05P	7/16"	1.454" 1.474"	0.410"
4 mm*	M5 x 0.8 R1/8	PO-MA04M5 PO-MA04MR	10 mm	1.454" 1.474"	0.410"
6 mm*	M5 x 0.8 R1/8 R1/4	PO-MA06M5 PO-MA06MR PO-MA06M2	12 mm 10 mm 14 mm	1.556" 1.556" 1.616"	0.520"
1/4"	#10-32 1/8" NPT 1/4" NPT 3/8" NPT	PO-MA08N PO-MA08P PO-MA08Q PO-MA08W	1/2" 1/2" 9/16" 11/16"	1.620" 1.620" 1.682" 1.722"	0.520"
5/16"	1/8" NPT 1/4" NPT	PO-MA10P PO-MA10Q	9/16"	1.800"	0.580"
3/8"	1/8" NPT 1/4" NPT 3/8" NPT	PO-MA12P PO-MA12Q PO-MA12W	11/16"	1.823" 1.923" 1.943"	0.720"
1/2"	1/4" NPT 3/8" NPT 1/2" NPT	PO-MA16Q PO-MA16W PO-MA16Z	7/8"	1.965" 2.125" 2.195"	0.830"

Codo apilable

(paquete de 5 unidades)

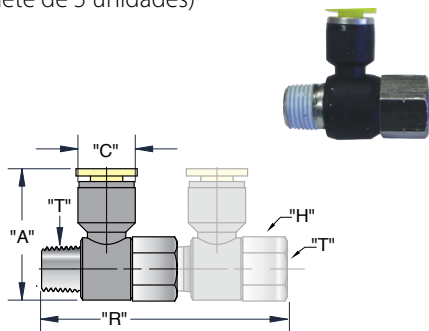


Tubería	Rosca "T"	No. de parte	"A"	"C"	"R"	"H" Hex.
5/32"	#10-32 1/8" NPT	PO-SE05N PO-SE05P	0.980" 1.095"	0.410"	1.435"	5/16" 5/16"
1/4"	#10-32 1/8" NPT 1/4" NPT	PO-SE08N PO-SE08P PO-SE08Q	1.165" 1.200" 1.365"	0.524"	2.250" 2.250" 2.600"	1/2" 1/2" 11/16"
5/16"	1/4" NPT 3/8" NPT	PO-SE10Q PO-SE10W	1.425" 1.570"	0.580"	2.600" 2.900"	11/16" 3/4"
3/8"	1/4" NPT 3/8" NPT	PO-SE12Q PO-SE12W	1.625" 1.690"	0.720"	2.530" 2.970"	11/16" 3/4"
1/2"	3/8" NPT 1/2" NPT	PO-SE16W PO-SE16Z	1.740" 1.950"	0.850"	2.970" 3.160"	3/4" 1"

Se muestran conectores apilados

Montaje en manifold

(paquete de 5 unidades)



Tubo flexible "A"	Tubo flexible "B"	Rosca "T"	No. de parte	"C"	"R"
1/4"	5/32"	1/8" NPT	PO-MM0805P	0.524"	2.665"
5/16"	1/4"	1/4" NPT	PO-MM1008Q	0.580"	2.820"

* Los conectores tienen un botón de liberación verde
Nota: Los conectores con rosca para tuberías NPT, R1/8, R1/4 y R3/8 se suministran con sellador pre aplicado.

