

ACCESSORIES



EVB-2 & EVB-3 Booster

Clippard EVB-2 & EVB-3 booster valves mate with manifold mount EC, EV, and ET valves and manifolds to provide increased flow. Direct piloting from a Clippard EC, EV and ET valve provides a flow of up to 6.1 SCFM at 100 psig.

2020/2021 High Flow Valves

Model 2020 and 2021 high flow valves are piloted 3-way valves that work with the Clippard EC, EV, and ET 3-way manifold valves. Output from the EC, EV, or ET will actuate the valve and produce output up to 22 SCFM at 100 psig. Piloted 4-way valves are also available as R-481 and R-482.





Dual Supply Manifold

Shown is the 15490-3 Clippard Dual Supply Manifold with two ET-3M electronic/pneumatic interface valves. 1/8" NPT inlet is seen at the left of the manifold with the dual #10-32 port outlets at the right.

Multi-Valve Manifolds

Multi-valve manifolds are available in two lengths with either single or double (top or top and bottom) rows of outputs for versatility in application. Input to all valves mounted on this manifold is through the manifold end. Outputs are individual #10-32 ports for hose barb fittings and vinyl or urethane hose.

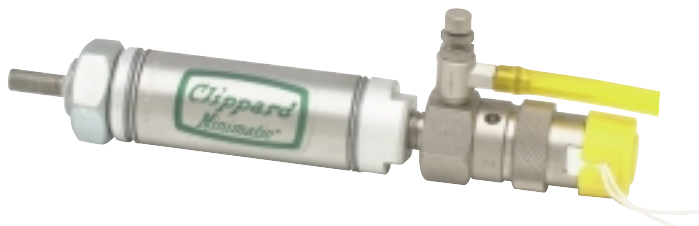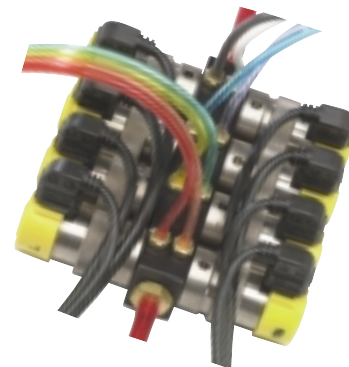

Pilot Manifold

Here a Clippard ET valve is mounted to the 15491-1 Clippard Pilot manifold, making it possible for the ET-3M valve controlled by an electronic signal to actuate a larger air-piloted valve or an air cylinder.