




MINIMATIC® QUICK CONNECT

Valve Body

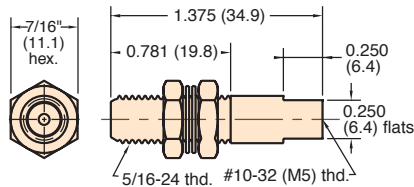

Part No. Description
MQC-V3 Valve Body

Material: Brass

Thread: Tapped #10-32

Mounting: In panel or bracket to 1/4" thick with two 7/16" mounting nuts and lockwashers furnished; like MQC-V2, but end is tapped #10-32 instead of threaded


Seals: Buna-N

Use: For connection with external shut-off to external hose, use hose connectors: MQC-F, MQC-FT, MQC-F2

Options: (-ENP), (-M5)



Valve Body

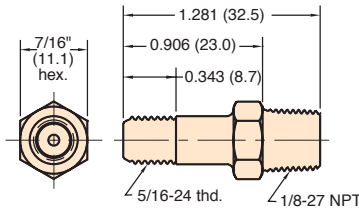

Part No. Description
MQC-VP Valve Body

Material: Brass


Thread: 1/8" NPT base; 5/16-24 body

Use: For connection with external shut-off to external hose, use hose connectors: MQC-F, MQC-FT, MQC-F2

Seals: Buna-N

Options: (-ENP), (-MR)

1/8" Hose Connector

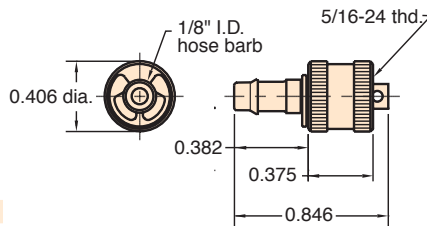

Part No. Description
MQC-FS Hose Connector

Material: Brass

Thread: I.D. of knurled end screws onto male end of valve bodies

For Use With: 1/8" I.D. Vinyl, Buna-N or braided hose


Installation: Simply push hose onto barbed end and secure with hose clamp 5000-1, 5000-2 or 5000-1A.

Seals: Buna-N

Options: (-ENP)

Triple Barb: Order MQC-F

1/16" Hose Connector

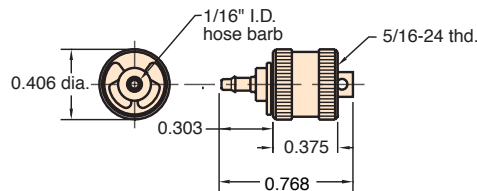

Part No. Description
MQC-F2S Hose Connector

Material: Brass

Thread: I.D. of knurled end screws onto male end of valve bodies

For Use With: Subminiature VYH1-0402-CLT 1/16" ID vinyl hose

Installation: Simply push hose onto barbed end and secure with slip-over hose clamp furnished


Seals: Buna-N

Options: (-ENP)

Triple Barb: Order MQC-F2



#10-32 (M5) Tapped Connector

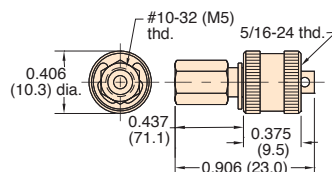

Part No. Description
MQC-FT #10-32 Connector

Material: Brass

Thread: Outlet is tapped #10-32 or M5 Metric. I.D. of knurled end screws onto male end of valve bodies: MQC-V2, MQC-V3, MQC-VP

Mounting: Outlet mounts with #10-32 (M5) short coupling 11999

Seals: Buna-N

Options: (-ENP), (-M5)



Tip

When assembling #10-32 threaded fittings with gaskets, turn the fitting in until the gasket contacts the surface. Then give the fitting less than a 1/4 turn to achieve a good seal.