




## TV 4-Way Toggle Valves

### M-TV-4MP

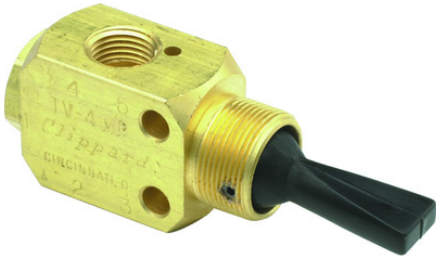

4-Way 3-position toggle valves with outlet ports open to atmosphere in the center position. The valve can be spring center, 3-position detent or the "DM" provides a detent on one side and spring return on the other side. The TV-DM model can be used on the momentary side as a "jog" or manual control, and with the detented side for an automatic or "run" mode.

|                               |                                        |
|-------------------------------|----------------------------------------|
| <b>Actuation</b>              | Momentary/Momentary                    |
| <b>Air Flow</b>               | 125 l/min @ 3.4 bar; 210 l/min @ 7 bar |
| <b>Force to Rotate Toggle</b> | 8 oz. nominal                          |
| <b>Included Item(s)</b>       | Nut & Lockwashers                      |
| <b>Input PSI</b>              | 10 bar max.                            |
| <b>Material, Body</b>         | Brass                                  |
| <b>Material, Spring</b>       | Stainless Steel                        |
| <b>Material, Toggle</b>       | Plastic                                |
| <b>Medium</b>                 | Air                                    |
| <b>Mount</b>                  | M16 x 1.5 thread                       |
| <b>Port</b>                   | G1/8                                   |
| <b>Product Line Brochure</b>  | <a href="#">Mechanical Valves</a>      |
| <b>Seals</b>                  | Nitrile Std., FKM & Krytox Optional    |
| <b>Unit</b>                   | Metric                                 |
| <b>Weight (lbs.)</b>          | 0.1800                                 |

