




## Air Pilot Valve Actuators

### MPA-5P

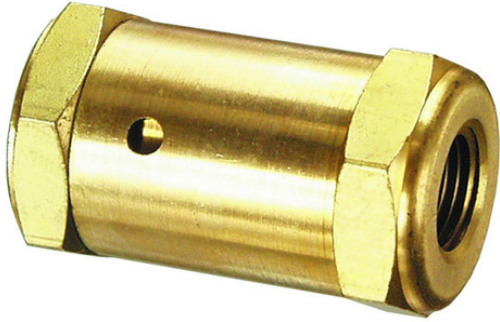

Air Pilot Valve Actuators thread onto the tops of Clippard miniature 2-Way, 3-Way, and 4-Way valves to provide fast pilot actuation from a pneumatic signal. They permit wide circuit flexibility and minimize cost, hazards and complexity by allowing many control functions to be accomplished pneumatically.

|                         |                                                                                      |
|-------------------------|--------------------------------------------------------------------------------------|
| <b>Accessories</b>      | Actuator Spacer <a href="#">12098-PKG</a> Pkg. of 10, <a href="#">12098-BLK</a> Bulk |
| <b>Bore Size</b>        | 5/8"                                                                                 |
| <b>Input PSI</b>        | 250 psig max.                                                                        |
| <b>Length</b>           | 1.312                                                                                |
| <b>Material, Body</b>   | Brass, Delrin Piston                                                                 |
| <b>Material, Seals</b>  | Nitrile                                                                              |
| <b>Material, Spring</b> | Stainless Steel                                                                      |
| <b>Max PSI</b>          | 250 psig                                                                             |
| <b>Medium</b>           | Air                                                                                  |
| <b>Mount</b>            | #15/32-32 Female Thread                                                              |
| <b>Port, Inlet</b>      | 1/8"NPT (3/8, 5/8, 1-1/4 Bore)                                                       |
| <b>Unit</b>             | Imperial                                                                             |
| <b>Weight (lbs.)</b>    | 0.0900                                                                               |

